




Colour :



Black

| SKU | Lumens | Colour | Beam |
|----------------------|--------|--------|------|
| AA-FLS2200-65 | 2200lm | 6500K | 90° |
| AA-FLS3000-65 | 3000lm | 6500K | 90° |
| AA-FLS3800-65 | 3800lm | 6500K | 90° |

Line Drawing

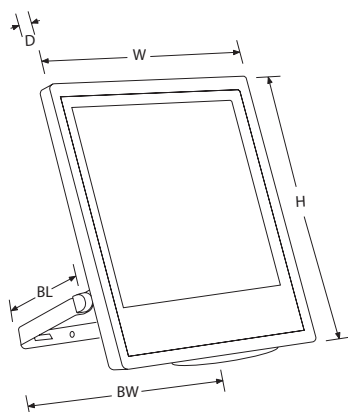

AA-FLS2200

(H) 200mm Height
(W) 226mm Width
(D) 45mm Depth
(BL) 128mm Bracket Length
(BW) 170mm Bracket Width

AA-FLS3000

(H) 280mm Height
(W) 240mm Width
(D) 45mm Depth
(BL) 160mm Bracket Length
(BW) 235mm Bracket Width

AA-FLS3800

(H) 280mm Height
(W) 260mm Width
(D) 45mm Depth
(BL) 160mm Bracket Length
(BW) 235mm Bracket Width

Product Features:

- Improved battery life through combined use of remote control and microwave sensor functionality
- Multi function remote control included
- 2000 times cycle life
- Mono 6V solar panels
- Brand new (not recycled) LiFePO4 batteries
- Charging time 4 - 5 hours
- Operational time - 12+ hours
- Microwave sensor built in - can be activated / de-activated by the remote control
- Dimmable by remote control

Product Specification:

| | |
|---------------------|--------------------|
| Installation Type | Surface Mount |
| Input Voltage | 100 - 277V |
| Luminaire Materials | Die Cast Aluminium |
| Lifetime | 50000 |
| CRI | 80 |
| IK Rating | IK08 |
| IP Rating | IP66 |
| Warranty | 3 Years |

Warranty:

This product has a warranty period of 3 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserve the right to alter.