



Colour :



White


SKU	Watts	lm/W	Lumens	Colour	Beam
600x600mm Non-Dimmable					
AA-MED6060/40	40W	120	4800lm	4000K	90°
1200x600mm Non-Dimmable					
AA-MED1260/40	50W	120	6000lm	4000K	90°

Triac, Dali, 1-10V dimmable & EM options available, contact sales office for more information


SKU	Description	Dimensions
Surface Mount Boxes		
SV-SM103B	Surface mount box for AA-MED6060	595 x 595 x 32mm
SV-SM106B	Surface mount box for AA-MED1260	1195 x 595 x 32mm

Line Drawing

Polar Curves

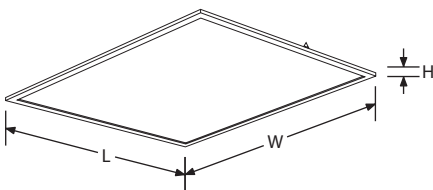

AA-MED6060	AA-MED1260
(L) 595mm Length	(L) 1195mm Length
(W) 595mm Width	(W) 595mm Width
(H) 32mm Height	(H) 32mm Height

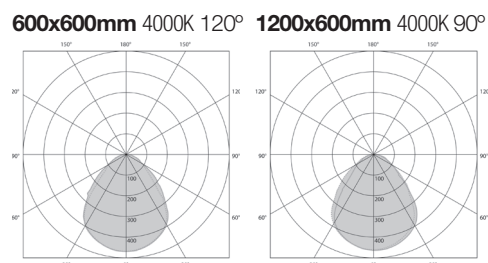

Product Features:

- Cyanosis index 1.5
- Delivering 120lm/W
- UGR19
- No light guide, removing the risk of yellowing
- PMMA lenses for uniformity of light
- SDCM <4 providing consistent light colour quality
- Lifetime is not affected by frequent switching when using occupancy controls
- Flicker free driver
- Power Factor > 0.9
- Suitable for installation in 15 and 24mm T-bar ceilings
- Flicker free
- 1.5kV surge protection

Product Specification:

Installation Type	Recessed, Surface or Suspended
Input Voltage	220 - 240V
Luminaire Materials	Aluminium + Iron + PS
Lifetime	50000
CRI	90+
IK Rating	IK03
IP Rating	IP54 front (IP20 back)
Warranty	7 Years

Warranty:

This product has a warranty period of 7 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserve the right to alter.