



**7 YEAR
WARRANTY**

**HIGH
EFFICIENCY**

**WATTAGE
SELECTABLE**

SKU	Watts	lm/W	Lumens	Colour	Beam
600mm Feed in unit					
AA-RLS6WS-30B	11W / 14W / 17W / 20W	up to 155	1540-2800lm	3000K	90°
AA-RLS6WS-40B	11W / 14W / 17W / 20W	up to 155	1650-3000lm	4000K	90°
600mm Joiner unit					
AA-RLJ6WS-30B	11W / 14W / 17W / 20W	up to 155	1540-2800lm	3000K	90°
AA-RLJ6WS-40B	11W / 14W / 17W / 20W	up to 155	1650-3000lm	4000K	90°
1200mm Feed in unit					
AA-RLS12WS-30B	22W / 28W / 34W / 40W	up to 155	3080-5600lm	3000K	90°
AA-RLS12WS-40B	22W / 28W / 34W / 40W	up to 155	3300-6000lm	4000K	90°
1200mm Joiner unit					
AA-RLJ12WS-30B	22W / 28W / 34W / 40W	up to 155	3080-5600lm	3000K	90°
AA-RLJ12WS-40B	22W / 28W / 34W / 40W	up to 155	3300-6000lm	4000K	90°
1500mm Feed in unit					
AA-RLS15WS-30B	34W / 42W / 51W / 60W	up to 155	4760-8400lm	3000K	90°
AA-RLS15WS-40B	34W / 42W / 51W / 60W	up to 155	5100-9000lm	4000K	90°
1500mm Joiner unit					
AA-RLJ15WS-30B	34W / 42W / 51W / 60W	up to 155	4760-8400lm	3000K	90°
AA-RLJ15WS-40B	34W / 42W / 51W / 60W	up to 155	5100-9000lm	4000K	90°

Colour options:




Black

Triac, Dali, 1-10V dimmable & EM options available, contact sales office for more information
White option available, contact sales office for more information

Accessories


AA-RLA-CT	Feed-In Gland Accessory, for starting a run
AA-RLA-EC	End-Cap Accessory, for ending a run
AA-RLA-MC	Mounting Clip Accessory

Line Drawing

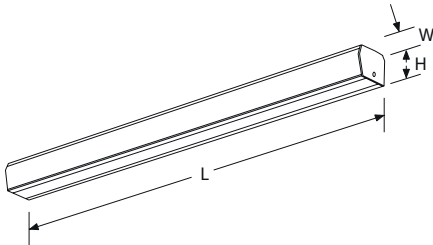

AA-RL6WS	AA-RL12WS	AA-RL15WS
(L) 595mm Length	(L) 1195mm Length	(L) 1495mm Length
(W) 60mm Width	(W) 60mm Width	(W) 60mm Width
(H) 52mm Height	(H) 52mm Height	(H) 52mm Height

Polar Curves



Product Features:

- High quality aluminium body
- Wattage selectable
- Polycarbonate back cover
- Modular design
- Linkable allows for continuous uninterrupted linear light.
- Supplied with mounting clips and can be ordered separately
- Flicker free
- 2kV surge protection

Product Specification:

Installation Type	Surface Mount
Input Voltage	198 - 264V
Luminaire Materials	Aluminium
Lifetime	50,000
CRI	80
IP Rating	IP20
Warranty	7 Years

Warranty:

This product has a warranty period of 7 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserve the right to alter.