



**7 YEAR
WARRANTY**

**HIGH
EFFICIENCY**

Colour options:




White

| SKU | Watts | lm/W | Lumens | Colour | Beam |
|-------------------|-------|------|--------|--------|------|
| 600x600mm | | | | | |
| EN-LPB6060B-40 | 29W | 140 | 4060lm | 4000K | 110° |
| EN-LPB6060B-50 | 29W | 140 | 4080lm | 5000K | 110° |
| 1200x600mm | | | | | |
| EN-LPB1260B-40 | 40W | 140 | 5600lm | 4000K | 120° |
| EN-LPB1260B-50 | 40W | 140 | 5640lm | 5000K | 120° |
| 1200x300mm | | | | | |
| EN-LPB1230B-40 | 29W | 140 | 4060lm | 4000K | 110° |
| EN-LPB1230B-50 | 29W | 140 | 4080lm | 5000K | 110° |

Triac, Dali, 1-10V dimmable & EM options available, contact sales office for more information


| Cat. No. | Description | Dimensions |
|----------------------------|--|-------------------|
| Surface Mount Boxes | | |
| SV-SM103B | Surface mount box for EN-LPB6060B | 600 x 600 x 50mm |
| SV-SM106B | Surface mount box for EN-LPB1260B | 1200 x 600 x 50mm |
| SV-SM107B | Surface mount box for EN-LPB1230B | 1200 x 300 x 50mm |

Line Drawing

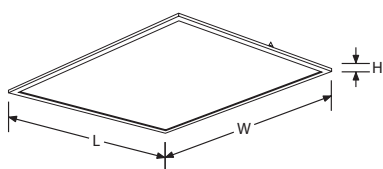

| EN-LPB060 | EN-LPB1260 | EN-LPB1230 |
|------------------|-------------------|-------------------|
| (L) 595mm Length | (L) 1195mm Length | (L) 1195mm Length |
| (W) 595mm Width | (W) 595mm Width | (W) 295mm Width |
| (H) 32mm Height | (H) 32mm Height | (H) 32mm Height |

Polar Curves

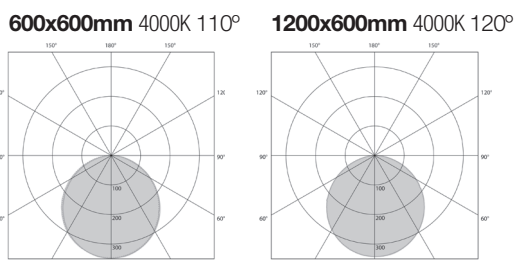

Product Features:

- No light guide, removing the risk of yellowing
- Delivering 140lm/W**
- PMMA lenses for uniformity of light
- SDCM <4 providing consistent light
- colour quality
- Lifetime is not affected by frequent switching when using occupancy controls
- Power Factor > 0.9
- Suitable for installation in 15 and 24mm T-bar ceilings
- Flicker free
- 1.5kV surge protection

Product Specification:

| | |
|---------------------|--------------------------------|
| Installation Type | Recessed |
| Input Voltage | 220 - 240V |
| Luminaire Materials | Die Cast Aluminium + Iron + PS |
| Lifetime | 50000 |
| CRI | 80 |
| IK Rating | IK03 |
| IP Rating | IP20 |
| Warranty | 7 Years |

Warranty:

This product has a warranty period of 7 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserve the right to alter.