



Cat. No.	Watts/m	No. of LEDs/m	Colour	lm/m	lm/W
<b>AA-ST10160CCX</b>	16W	640	2700K & 6500K	1500lm combined	94 combined

#### Accessories


<b>AA-ST10CA</b>	LEDline™ COB single colour strip connector
<b>AA-ST10CB</b>	LEDline™ COB single colour wired strip connector
<b>AA-ST10CC</b>	LEDline™ COB single colour inter-connection strip connector
<b>AA-ST10CD</b>	LEDline™ COB single colour 90° strip connector

Cat. No.	Description	Metres per driver
<b>LED Drivers</b>		
<b>SV-LRS-35-24</b>	35W non-dimmable 24V constant voltage driver	2m
<b>SV-LRS-50-24</b>	50W non-dimmable 24V constant voltage driver	3m
<b>SV-LRS-75-24</b>	75W non-dimmable 24V constant voltage driver	4.5m
<b>SV-LRS-100-24</b>	100W non-dimmable 24V constant voltage driver	5.5m
<b>SV-LRS-150-24</b>	150W non-dimmable 24V constant voltage driver	8.5m
<b>SV-LRS-200-24</b>	150W non-dimmable 24V constant voltage driver	10m
<b>Max single run 5m</b>		

#### Product Features:

- Single colour flexible strip with 3M™ self adhesive backing
- High efficiency at 94lm/W
- Cut points every 25mm for maximum flexibility
- Beam angle of 120°
- 640 LEDs per metre
- For runs over 5m individual lengths should be connected in parallel
- Reel length of 30m


#### Line Drawing



#### Connectors

- AA-ST10CA** LEDline™ COB single colour strip connector
- AA-ST10CB** LEDline™ COB single colour wired strip connector
- AA-ST10CC** LEDline™ COB single colour inter-connection strip connector
- AA-ST10CD** LEDline™ COB single colour 90° strip connector

Colour Tuneable

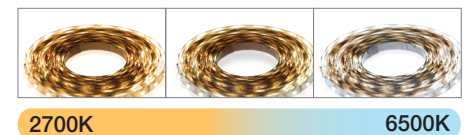

2700K

6500K

#### Warranty:

This product has a warranty period of 3 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserve the right to alter.