



**HIGH
EFFICIENCY**

Colour options:




Black White

SKU	Watts	lm/W	Lumens	Colour	Beam
600x600mm					
EN-LPB6060B-40	29W	140	4060lm	4000K	110°
EN-LPB6060B-50	29W	140	4080lm	5000K	110°
1200x600mm					
EN-LPB1260B-40	40W	140	5600lm	4000K	120°
EN-LPB1260B-50	40W	140	5640lm	5000K	120°
1200x300mm					
EN-LPB1230B-40	29W	140	4060lm	4000K	110°
EN-LPB1230B-50	29W	140	4080lm	5000K	110°
AA-DDLB101-40*	10W	4000K	97	970	50°

Triac, Dali, 1-10V dimmable & EM options available, contact sales office for more information

Cat. No.	Description	Dimensions
Surface Mount Boxes		
SV-SM103B	Surface mount box for EN-LPB6060B	600 x 600 x 50mm
SV-SM106B	Surface mount box for EN-LPB1260B	1200 x 600 x 50mm
SV-SM107B	Surface mount box for EN-LPB1230B	1200 x 300 x 50mm


Line Drawing

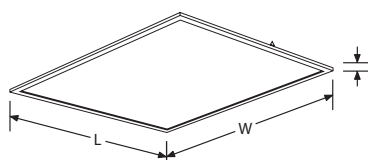


EN-LPB6060	EN-LPB1260	EN-LPB1230
(L) 595mm Length	(L) 1195mm Length	(L) 1195mm Length
(W) 595mm Width	(W) 595mm Width	(W) 295mm Width
(H) 32mm Height	(H) 32mm Height	(H) 32mm Height

Polar Curves

600x600mm 4000K 110°



1200x600mm 4000K 120°



Product Features:

- No light guide, removing the risk of yellowing
- Delivering 140lm/W
- PMMA lenses for uniformity of light
- SDCM <4 providing consistent light colour quality
- Lifetime is not affected by frequent switching when using occupancy controls
- Flicker free driver
- Power Factor > 0.9
- Suitable for installation in 15 and 24mm T-bar ceilings

Product Specification:

Installation Type	Recessed
Input Voltage	220 - 240V
Luminaire Materials	Die Cast Aluminium + Iron + PS
Lifetime	50000
CRI	80
IK Rating	IK03
IP Rating	IP20
Warranty	5 Years

Warranty:

This product has a warranty period of 5 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserve the right to alter.